



A

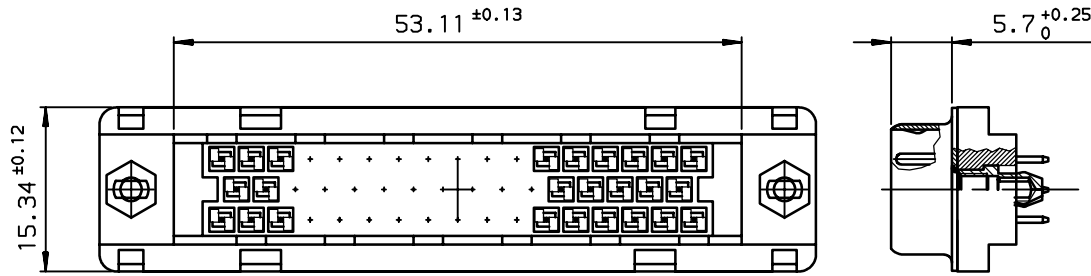

B

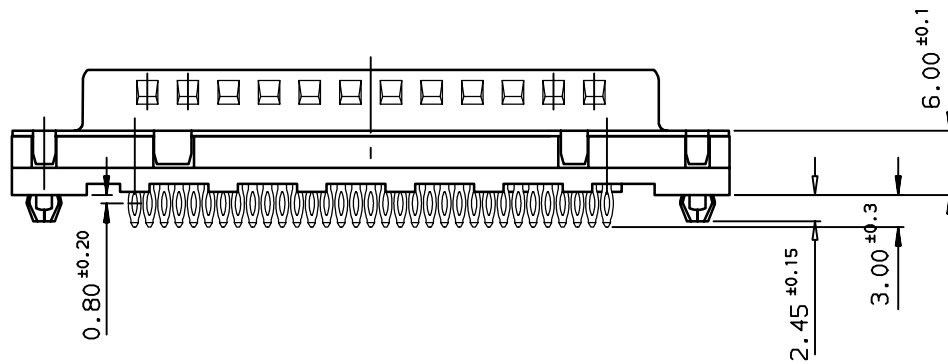

C

TIN LEAD PART NUMBER


PART NUMBER	
flash gold	D50P91C4GX00
0.76μ gold	D50P91C6GX00

LEAD FREE PART NUMBER


PART NUMBER	
flash gold	D50P91C4GX00LF
0.76μ gold	D50P91C6GX00LF

D

rev	ecn no	dr	date
B	-	LEN	1996/07/25
C	LS05-004	MPE	2005/02/10
D	LS06-0095	LGO	2006/06/28
E	LS06-0140	LGO	2006/09/25
-	-	-	-
-	-	-	-
-	-	-	-

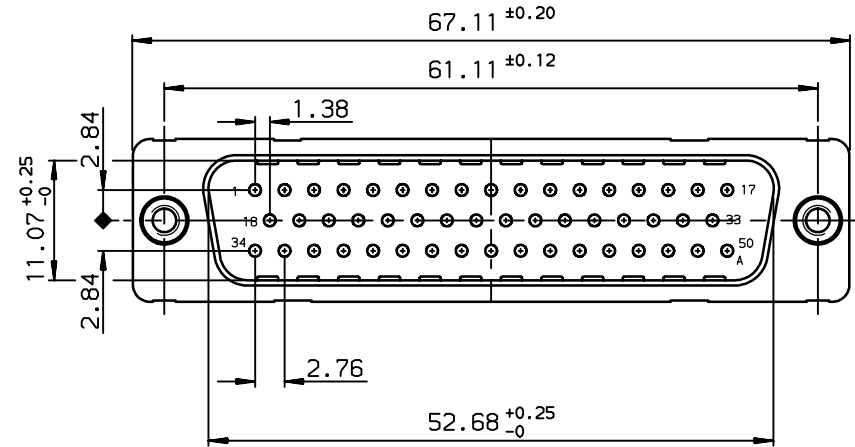

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

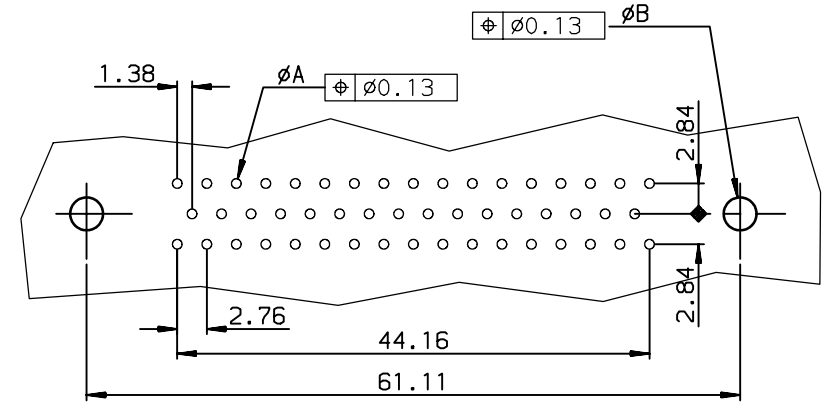

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 2
		TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	PESSON	1995/10/03	0.X	±0.1		
Eng	PESSON	1995/10/03	0.XX	±0.1		
Chr	LEGARE	1995/10/03	0.XX' ±2'	±0.1		
Appr	LEGARE	1995/10/03	0.XXX	±0.1		
Product family		D-SUB		Spec ref -		
Title MALE CONNECTOR DELTA D 50-EUROPE straight press fit		dwg no C01-8646-0378		Rev. E		
catalog no		-		CUSTOMER sheet 1 of 1		



Copyright FCI.